


Note on using the BKM-41HD/42HD

When input option slots on the rear of the monitor are already fitted with a BKM-41HD/42HD HD SDI Input Adaptor (option), do not try to install another adaptor or the analog input connectors board in the slot to the

right or fit a cover plate (see Fig. 1) over that slot. Doing so may cause the radiation shield (see Fig. 2) of the BKM-41HD/42HD to be damaged or detached.

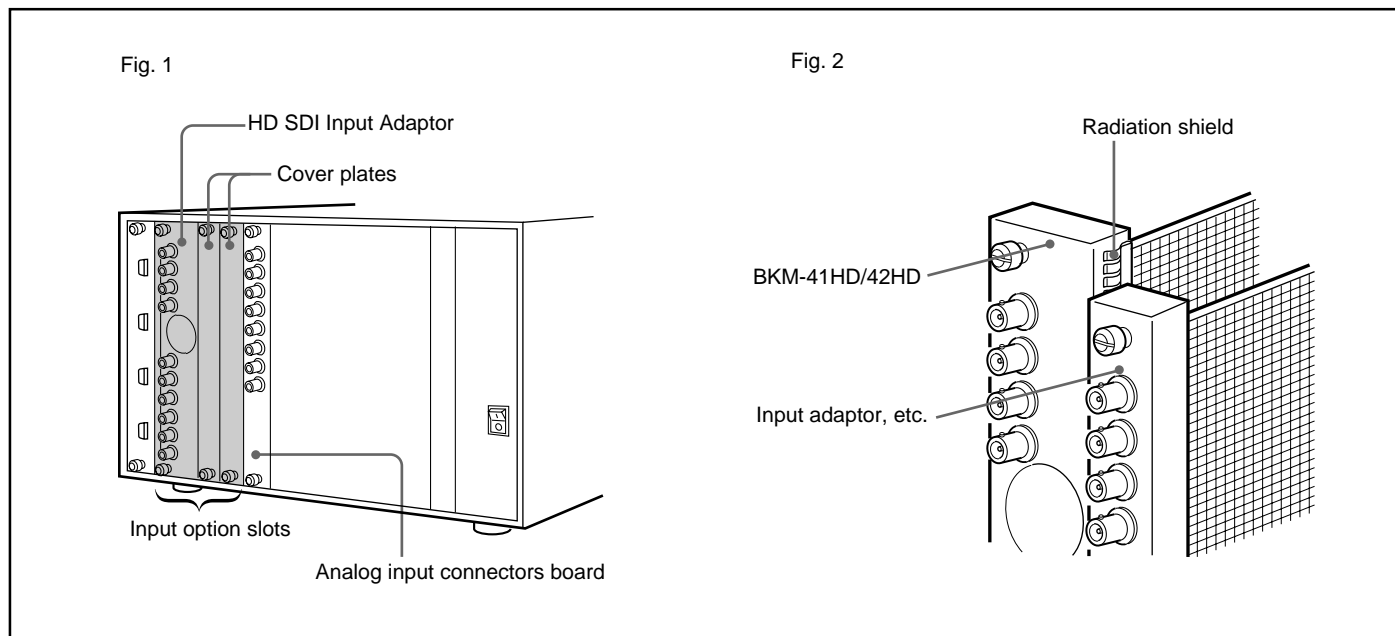

When installing adaptors, moving the analog input connectors board, or fitting a cover plate over an unused slot, always **fit the BKM41HD/42HD at the last step of the operation.** If a BKM-41HD/42HD is already installed, remove it temporarily while carrying out the other operations, then reinstall it last.

Note

When installing two or more BKM-41HD/42HD and BKM-20D/21D adaptors in any combination, first use the rightmost option slot, then the second rightmost option slot, and so on. (Before carrying out this installation operation, make sure that the slot to the right of the target slot(s) is already fitted with an adaptor.)